

Ford Pocket Style[®] Fender Flares Rear Pair

Rear Pair #20090-02
Rev-0 5/2/2014

STEP 1 – PRIOR TO INSTALLATION

- A) Bushwacker only** approves installing the flares according to these written instructions with the hardware provided. **WARNING:** Failure to install according to these instructions will invalidate the warranty. This includes, but is not limited to using alternative installation methods, hardware, or materials. **DO NOT USE:** Loctite, SuperGlue, or similar products on the hardware or the flares.
- B) Fit:** Verify the fit of the flares to vehicle. (Some filing, sanding, or cutting may be necessary to ensure proper fit).
- C) Painting:** (Optional) if paint is desired it must be done prior to installing flares on vehicle. Clean outer surface with a good grade degreaser. **DO NOT USE LACQUER THINNER OR ENAMEL REDUCER AS A DEGREASER.** Wipe outer surface thoroughly with a tack rag prior to paint. Application of plastic adhesion promoter for ABS plastic as per your paint system manufacturer's recommendations is required. Paint flares using a high quality enamel, or polyurethane automotive paint. If painting edge trim (not recommended), use a flex additive.
- D) Performance:** Using larger Tires may increase the area required to turn the vehicle. Some Tire/Rim combinations may require lowering bump stops and or installing steering stops to prevent tire from contacting flare.
- E) Exhaust System:** Modifications may be necessary to maintain a minimum 4" clearance between flares and exhaust pipes. (Exhaust gases should not vent directly onto flares)
- F) Metal Protection:** All exposed fasteners and bare metal should be treated with rust resistant paint **BEFORE** installing flares. Spray inner fender wells with undercoating **AFTER** flare attachments have been completed.
- G) Decals:** Flares may interfere with existing decals on vehicle. If you wish, remove decals prior to installation of flares.

TOOLS FOR EASY INSTALLATION:

- Utility Knife
- Socket Wrench
- 10mm Socket
- #2 Phillips Screwdriver
- Pry Tool
- Electric Drill

LIMITED LIFETIME WARRANTY AGAINST ANY MANUFACTURING DEFECTS

- To claim a warranty, you must provide Proof of Purchase.

Included in Hardware Kit:

- | | | | | | | |
|---|---|--|---|---|--|---|
| 1. 
SW1-0066,
#8 x 5/8" Phillips
PH Drill Screw,
2 pcs | 2. 
SW1-0056,
#8 x 3/4"
PH Screw,
12 pcs | 3. 
CL1-0022,
#10 "U" Clip,
8pcs | 4. 
SW1-0067,
5/16 x 18 x 3/8"
SS Torx Screw,
11 pcs | 5. 
NU1-0019,
5/16-18 Jam Fin.
Nylock Nut,
11 pcs | 6. 
WA1-0012,
.320 x .700 x .03
SS Washer,
11 pcs | 7. 
SW1-0052,
T-45 Torx Bit,
1 pc |
| 8. 
GP1-0007,
Med. Wiper Style
Edge Trim,
180 inches | 9. 
ET1-0002,
Edge Trim Tool,
1 pc | | | | | |

Component List:



STEP 2 - EDGE TRIM INSTALLATION

A. Peel two to three inches of red vinyl backing away from Edge Trim (GP1-0007) tape. Applying the adhesive side of the edge trim to the inner side of the flare, affix the edge trim to the top edge of the flare (the portion that comes in contact with the vehicle).

B. Press edge trim into place along the top edge of the flare in one-foot increments, pulling red vinyl backing free as you continue to work your way around the top edge of the flare.

C. Apply Edge Trim to Front Bumper Piece if installing.



Pocket Hardware Installation:



3

Put a Washer (WA1-0012) on each Bolt (SW1-0067).



4


Put each Bolt/Washer combination through a pocket hole in the flare, Bolt head and Washer on the outside.



5

Place a Nut (NU1-0019) over the end of each Bolt and tighten, using a 1/2" wrench for the Nut and the supplied Torx Bit (SW1-0052) for the Bolt. Repeat for remaining pockets.

Rear Flare Installation Procedures (Passenger's Side):

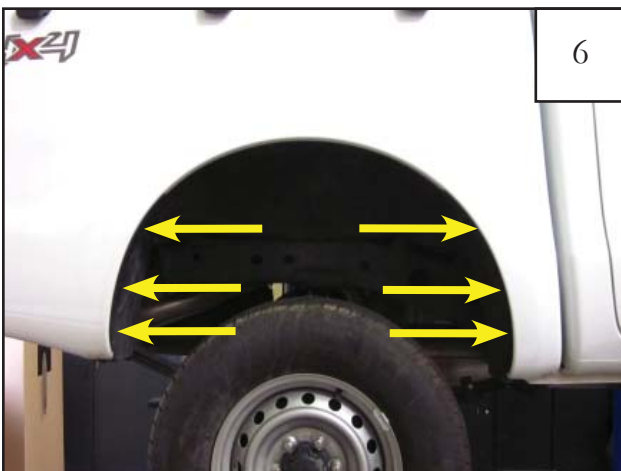

6

Using a #2 Phillips Screwdriver and or pry tool remove 6 pieces of factory hardware from the rear wheel well and discard. *Note: Some vehicle models will have factory mudflaps. These will need to be removed for proper installation of flares.*




7


Peel back the front wheel well liner and install three (3) supplied clips (CL1-0022) at the three locations indicated. Replace liner to original position.



Peel back the rear wheel well liner and install one (1) supplied clip (CL1-0022) at the location indicated. Replace liner to original position.

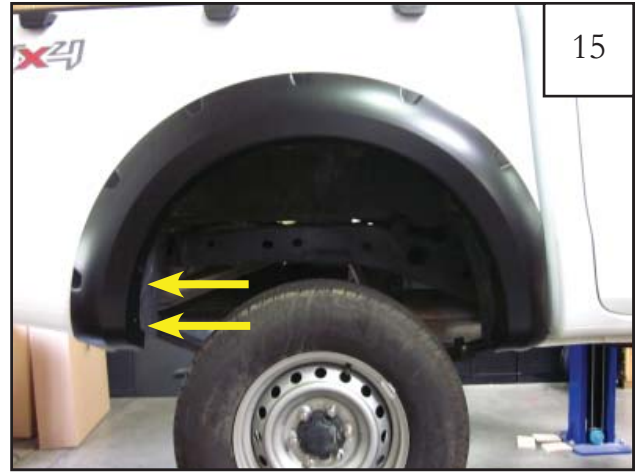

Using a #2 Phillips Screwdriver start two (2) supplied Screws (SW1-0056) thru flare and into factory hole locations using holes in flare as a guide.

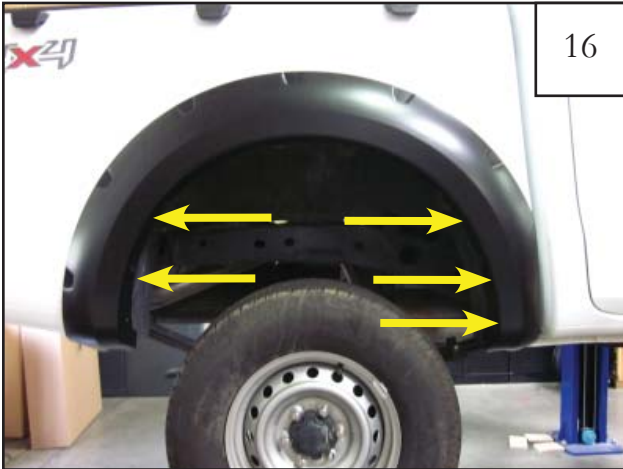

While holding Rear Flare onto vehicle using a #2 Phillips Screwdriver, start six (6) supplied Screws (SW1-0056) into flare and into clips installed in steps 13 & 14.




While using an electric drill install one (1) supplied self tapping screw (SW1-0066) into the center top location of flare and into sheet metal using hole in flare as a guide.



Tighten all screws. Rear flare installation complete.

Edge Trim Tool Procedures:

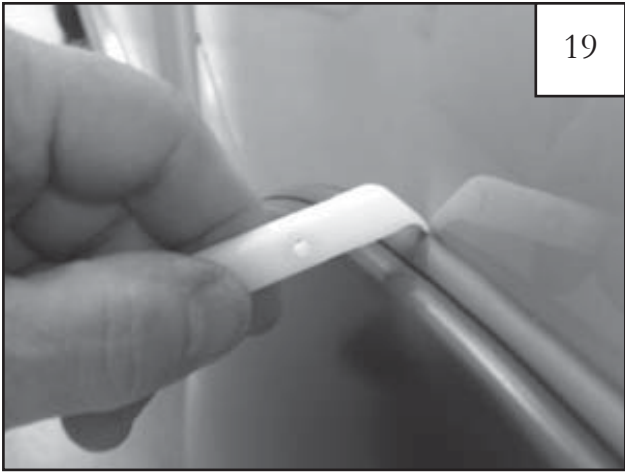

Using supplied Edge Trim Tool (ET1-0002), seat edge trim against vehicle by hooking curved end under edge trim at one end of flare. Next, slide around outer edge of flare to the other end.



Using flat end of supplied Edge Trim Tool (ET1-0002), seat edge trim against flare by inserting straight end between edge trim and flare at one end. Next, slide around entire edge to the other end.